




NOTES:

1. When connecting street centerlines deflect from each other at any one point by more than five degrees, ($\Delta > 5^\circ$), they shall be connected by a curve with a radius of not less than 100 feet ($R \geq 100'$) for residential streets. For collector streets and thoroughfares, the radius should be sufficient to ensure a sight distance adequate for visibility and safety, considering the character of the street and the types and speed of traffic anticipated, but in no case shall such radius be less than 200 feet ($R \geq 200'$).

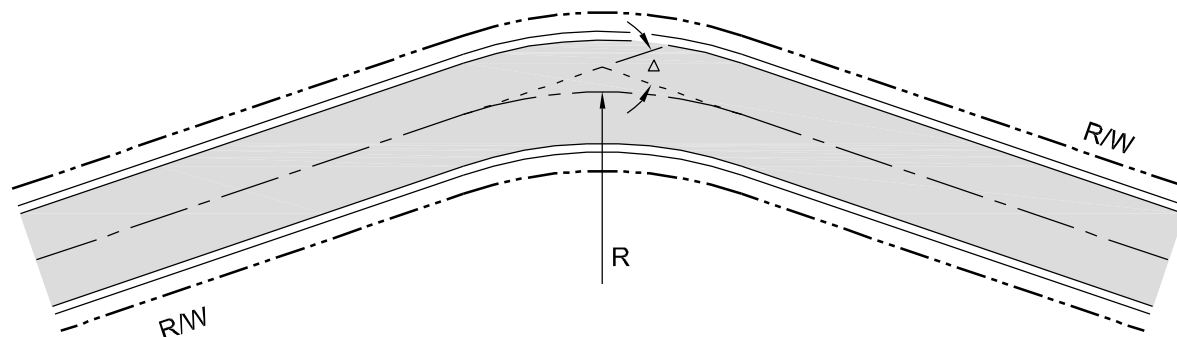

PUBLIC WORKS DEPARTMENT
1500 Beatty Street
Greenville, North Carolina 27834

CITY OF GREENVILLE, N.C.

USE WITH THE CITY OF GREENVILLE, N.C. STANDARD SPECIFICATIONS ONLY

www.greenvillenc.gov

No.	Date	Description
1	9/16/11	APPROVAL
Scale:	Sheet #:	Detail #
not to scale	1 of 1	412.03

CURVE RADIUS AT DEFLECTING STREET LINES