


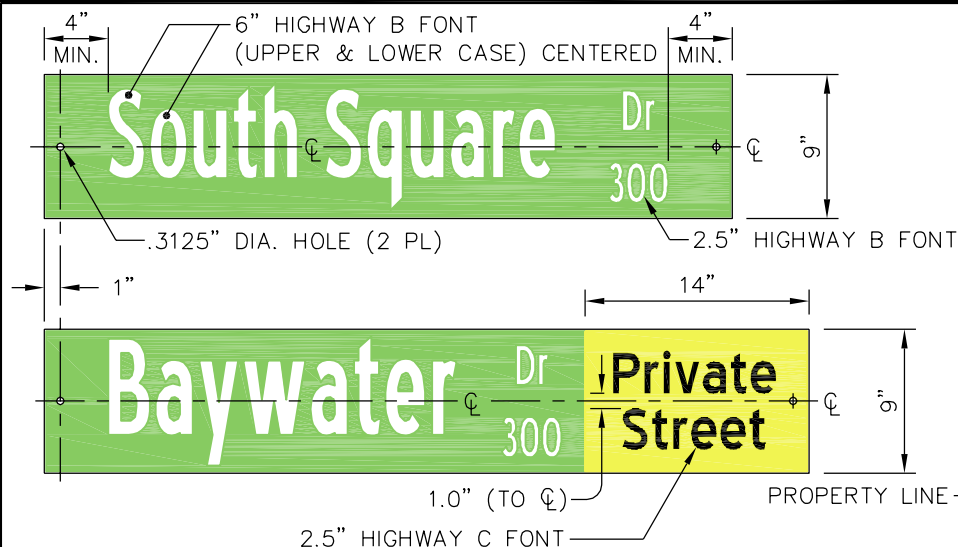


NOTES:

- 6" letters to be series "B" (FHWA)
- 2 1/2" letters to be series "B" (FHWA)
All letters and background materials to be "Scotchlite" or an approved equal and meet I.T.E. Specifications on reflectivity.
- Sign appearance shall be green background with white letters and white border.
- Fabricate sign as follows: Base sheeting shall be Hi-Intensity Prismatic (or equal). Overlay letter mask using translucent EC green film. Allow a 0.50" border to show.
- Aluminum sign blank materials to be 0.080" thick with 1.5" radius corners, 2-blanks per sign face.

RECOMMENDED INSTALLATION

- Street name sign to be one-foot from property line if said lines were extended.
- Sign blades not to extend past back of curb into road.
- Sign location to be placed on low side of block numbering.
- Any exceptions shall be approved by the City Engineer.
- Developer responsible for installation of all street signs.

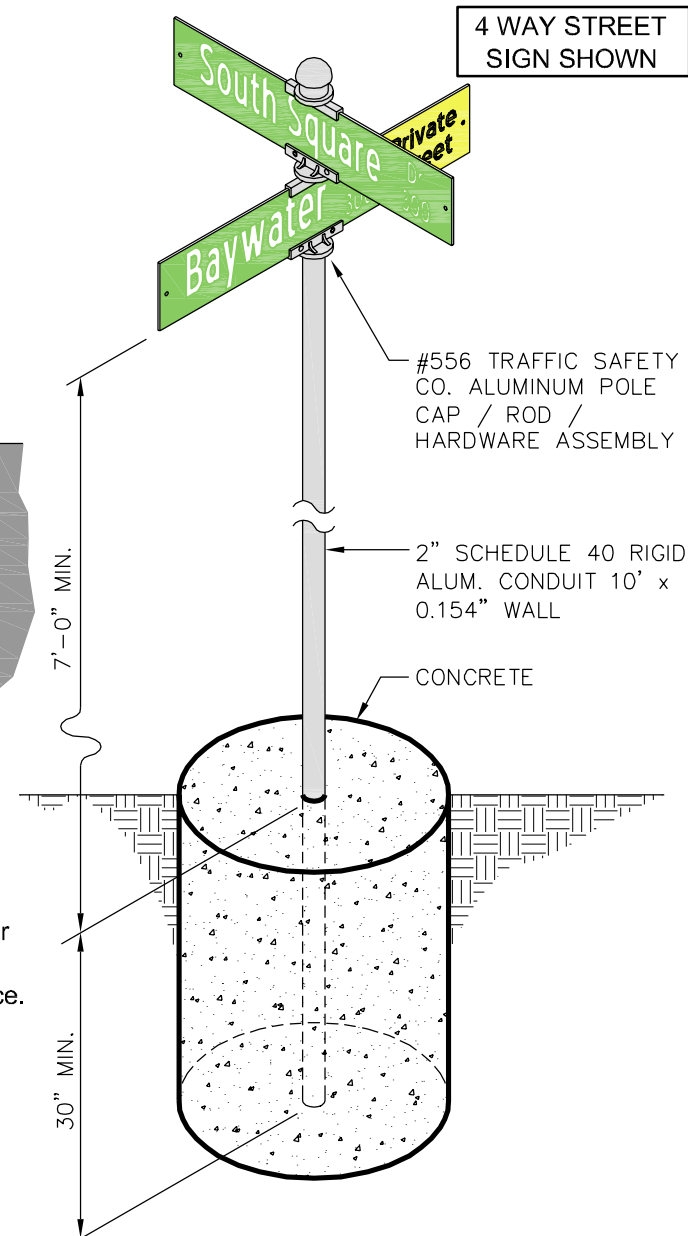

PUBLIC WORKS DEPARTMENT
1500 Beatty Street
Greenville, North Carolina 27834

CITY OF GREENVILLE, N.C.

USE WITH THE CITY OF GREENVILLE, N.C. STANDARD SPECIFICATIONS ONLY

www.greenvillenc.gov

No.	Date	Description
1	9/16/11	APPROVAL
Scale: not to scale	Sheet #: 1 of 1	Detail # 414.01

STREET NAME SIGNS - 9" SIGN HEIGHT