DocuSign Envelope ID: 48E8445A-B6A7-44DA-9BC8-F2FC4B918207

SIGN NUMBER: TEMPORARY
TYPE: D
QUANTITY: SEE PLANS

SIGN WIDTH: 2′-0″
HEIGHT: 1′-6″
TOTAL AREA: 3.0 Sq.Ft.

BORDER TYPE: INSET
RECESS: 0.47″
WIDTH: 0.63″
RADII: 1.5″

NO. Z BARS:
LENGTH:

BACKG COLOR: Fluorescent Orange
COPY COLOR: Color 239

SYMBOL	X	Y	WID	HT

MAT′L: 0.080″ (2.0 mm) ALUMINUM

USE NOTES: 1,2

1. Legend and border shall be direct applied black non-reflective sheeting.
2. Background shall be NC GRADE B fluoresent orange retroreflective sheeting.

DESIGN BY: CLM
PROJECT ID: B-5100
CHECKED BY: BAM
DIV:
DATE: May 07, 2012

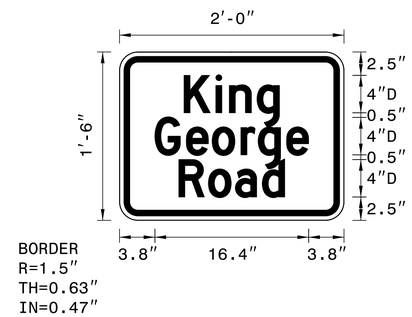

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter widths are shown

																											Series/Size Text Length
K	i	n	g																								D 2000
2.8	0.6	2.4	2.4																								10.2
G	e	o	r	g	e																						D 2000
2.7	2.4	2.4	1.5	2.4	2.4																						16.4
R	o	a	d																								D 2000
2.7	2.4	2.3	2.4																								11.3

FILENAME: Guidesign6

NORTH CAROLINA D.O.T. SIGN DETAIL

(TEMPORARY SIGN TO BE PAID FOR AS "STATIONARY WORK ZONE SIGNS")

TEMPORARY SIGN DESIGN FOR KING GEORGE ROAD OFF-SITE DETOUR

SEAL
State of North Carolina
NORTH CAROLINA PROFESSIONAL SEAL 21116 ENGINEER BOB A. MAY
3/30/2016

REVISIONS

NO.	DATE	DESCRIPTION	BY

WETHERILL ENGINEERING
1223 Jones Franklin Rd.
Raleigh, N.C. 27606
Bus: 919 851 8077
Fax: 919 851 8107
License No. F-0377
TRANSPORTATION PLANNING/DESIGN - BRIDGE/STRUCTURE DESIGN
CIVIL/SITE DESIGN - GIS/GPS - CONSTRUCTION OBSERVATION

B-5100, BRIDGE NO. 421
PITT COUNTY — CITY OF GREENVILLE — NORTH CAROLINA
TRAFFIC MANAGEMENT PLAN

DATE:	5/8/2012
SCALE:	NONE
DRAWN:	CLM
CHECKED:	BAM
PROJ. NO.:	B-5100
SHEET:	TMP-4

$$$$$$SYSTIME$$$$$$
$$$$$$DGNNAME$$$$$$
$$$$$$USERNAME$$$$$$